

Indoor Omni Ceiling Mounted Antenna

IXD-360V03NP

- V Pol, 360° Horizontal Beamwidth
- 698-960/1710-2700MHz
- 2.0/4.0dBi


Electrical Specifications

Frequency Range (MHz)	698-960		
	698-824	790-894	880-960
Polarization	Vertical		
Gain (dBi)	1.8		
Horizontal Beamwidth (°)	360		
VSWR	≤2.0:1		
Frequency Range (MHz)	1710-2700		
	1710-1990	1920-2170	2300-2700
Polarization	Vertical		
Gain (dBi)	3.5	4.0	
Horizontal Beamwidth (°)	360		
VSWR	≤1.5:1		
IM3 (2x33dBm Carrier) (dBc)	<-140		
Maximum Power per Port (W)	50		
Impedance (Ω)	50		

Mechanical Specifications

Mechanical Specifications		Outline Drawing
Dimensions, DiameterxDepth (mm) / (in)	Φ203x115 / Φ8.0x4.5	
Shipping Dimensions, HxWxD (mm) / (in)	175x175x175 / 6.9x6.9x6.9	
Net Weight, Antenna (kg) / (lb)	0.37 / 0.82	
Shipping Weight (kg) / (lb)	0.47 / 1.0	
Connector Type	1 x N-Female	
Connector Location	Bottom	
Radome Material and Color	ABS, White	
Operational Temperature (°C)	-30 to +45	

Connector Position

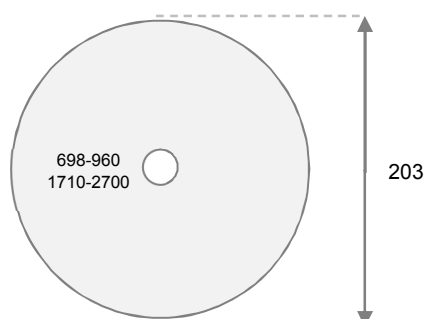

Installation Guide

