

Outdoor Dual-band Combiner

CM-PK2-ODx, CM-PK2D-ODx

CM-PK2-OAx, CM-PK2D-OAx

x=1, 2, 3 or 4, Preconfigured DC/AISG By-pass

1850-1910/1930-1990MHz 1710-1755/2110-2155MHz

Electrical Specifications

Frequency Range (MHz)	Band1: 1850-1910/1930-1990	Band2: 1710-1755/2110-2155
Insertion Loss (dB)	≤0.3	≤0.2
Isolation between Ports (dB)	≥55	
Return Loss (dB)	≥20	
Maximum Input Power per Port (W)	250	
Intermodulation Products (dBc)	≤-155@2x43dBm	
Impedance (Ω)	50	
DC/AISG transparency	By-pass (max. 3000 mA)	
Lightning Protection	Comply with IEC 61000-4-5; 8kA, 8/20μs	
MTBF (Hours)	≥500,000	


Mechanical Specifications

Model	Single Unit	Double Units
Dimensions, LxWxH (excluding connectors and mounting bracket) (mm) / (in)	167x143x45.5 / 6.6x5.6x1.8	167x143x108.5 / 6.6x5.6x4.3
Weight (kg) / (lb)	1.9 / 4.2	3.9 / 8.6
Shipping Dimensions, LxWxH (mm) / (in)	365x265x155 / 14.4x10.5x6.1	365x265x220 / 14.4x10.5x8.7
Shipping Weight (kg) / (lb)	2.9 / 6.4	5.0 / 11.0
RF Connectors	7/16 DIN-Female or 4.3-10 Female	
Mounting	Pole (clamps included for Φ35-125mm pole) or Wall Mounted	
Operating Temperature Range (°C)	-40 to +65	
Operational Humidity (%)	≤100	
Environmental Class	IP67	

Photo & Block Diagram



Single Unit

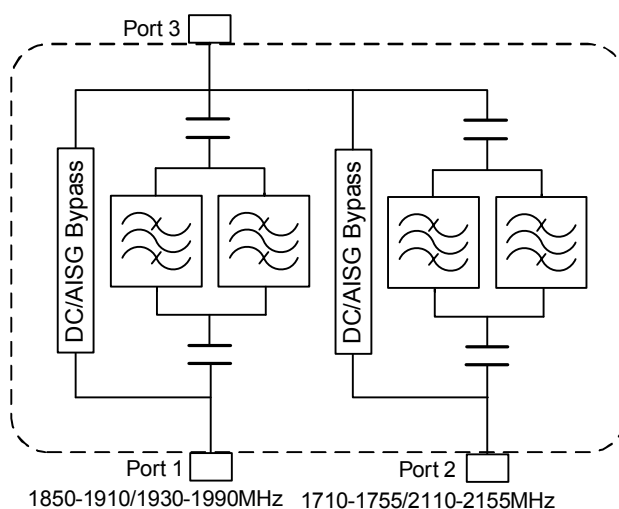

CM-PK2-OD4

Outdoor Dual-band Combiner


CM-PK2-ODx, CM-PK2D-ODx

CM-PK2-OAx, CM-PK2D-OAx

x=1, 2, 3 or 4, Preconfigured DC/AISG By-pass

1850-1910/1930-1990MHz 1710-1755/2110-2155MHz

Outline Drawing

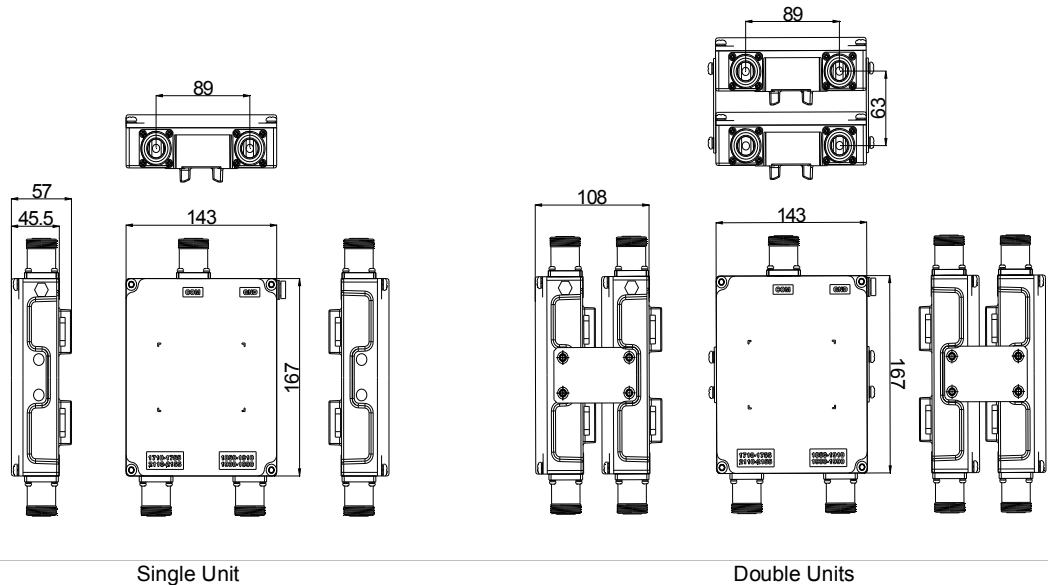

Ordering Information

Single Unit Model	Double Units Model	Connector Type
CM-PK2-ODx*	CM-PK2D-ODx*	7/16 DIN Female
CM-PK2-OAx*	CM-PK2D-OAx*	4.3-10 Female

* DC/AISG By-pass Optional: x=1,2,3 or 4

1- No DC/AISG By-pass

4- Full DC/AISG By-pass

2- DC/AISG By-pass@Band1

3- DC/AISG By-pass@Band2

Accessories

Model	Quantity	Description
00-W331-5106	2	Mounting Kit
KK63020099	2	Hose Clamp, Ø30-125mm